



GEKA® plus push-fit system

Circular- and sector sprinkler V 80 B


Advantages / benefits: **particularly robust** swing arm sprinkler made of metal in professional quality
watering of circular areas or individually adjustable circle sector
control of sprinkled area and spraying by screw
adjustment of throw length and elevation angle by deflector
infinitely variable adjustment of watering sector
series connection of several circular sprinklers with additional connection option
stable stand on lawn or in flower beds, maximum support surface thanks to star-shaped aluminum foot
particularly durable thanks to chrome-plated brass plug and cap
maximum flexibility thanks to 2 x G3/4 male thread: can be used with tap plug (scope of delivery) or claw coupling
 Easy connection with hose thanks to free access to the plug on both sides
compatible with all customary push-fit connector systems

Recommended pressure range bar	2 - 4
Throwing distance at 4 bar max. m	13
Diameter of irrigation at 4 bar m	0 - 26
Sprinkled surface at 4 bar max. m ²	0 - 531
Sector limitation	20° - 360°
Packaging	Cardboard box
PU units	1
Item no.	17.0012.9


4

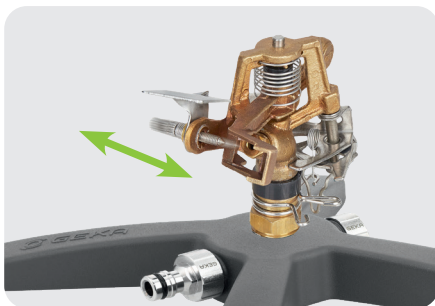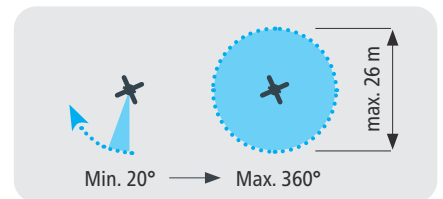

Regulation of irrigation area and spraying by jet interrupter stud

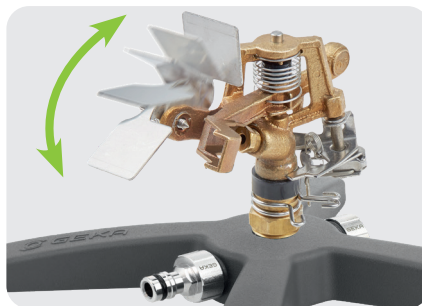

Throw length and elevation angle adjustable via deflector plate

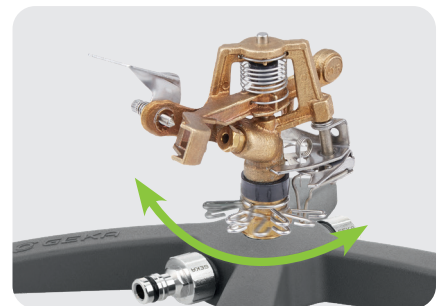

Sector limitation from 20° to 360°

